

Note:


(1). Modulating Board

Input Signal : 4~20mA, 1~5V, 2~10V.

(it is suggested to use the shielding wire and its length should not exceed 30m)

Output Signal : 4~20mA, 2~10V.

(2). Using less than 5A current for "A,B,C,D,E,F".

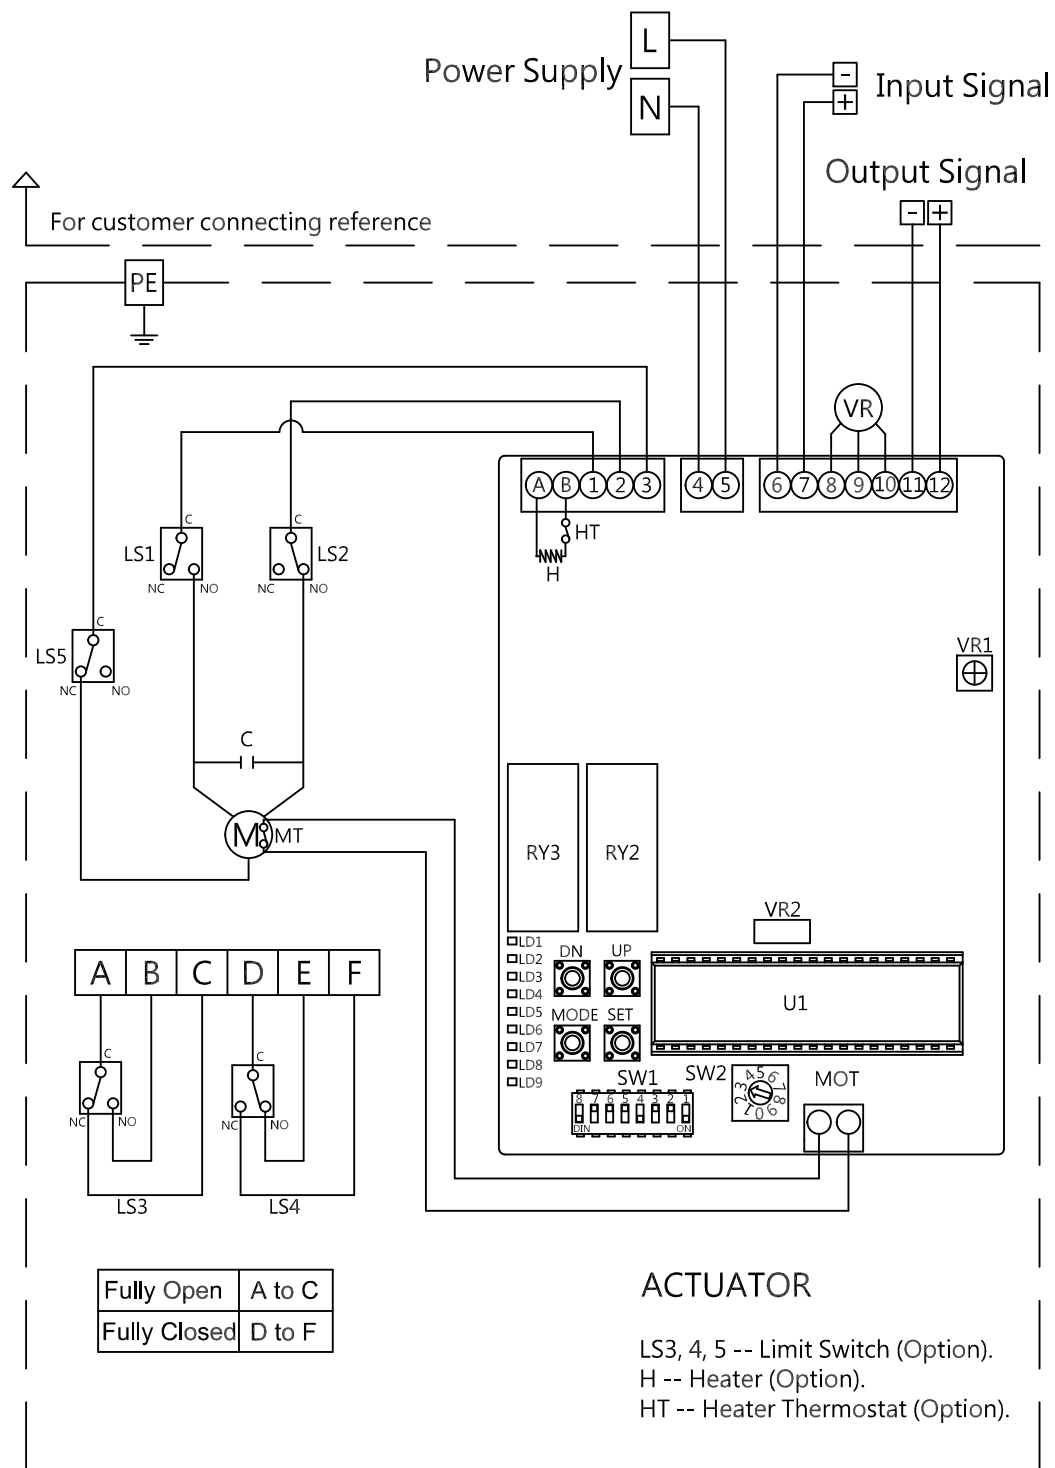

Wiring Diagram NO: 05-007-18-02-03-01-3-001

Rev	1.0	Signature	Date	CM100 · CM200 · CM300 · CM400 · CM500 · CM600 Power Supply : 220~240VAC 1-Phase Modulating Control 30% Duty Cycle
Designed				
Drawn	Wen Yao	2018/09/05		
Checked	Ming Hung	2018/09/05		
Approved				



SUN YEH ELECTRICAL IND. CO., LTD.  
 TEL: +886-4-2698-5666  
 FAX: +886-4-2698-1188