


Note:

(1). Modulating Board
Input Signal: 4~20mA, 1~5V, 2~10V.
(it is suggested to use the shielding wire and its length should not exceed 30m).
Output Signal: 4~20mA, 2~10V.

(2). Using less than 3A current for "A,B,C,D,E,F".

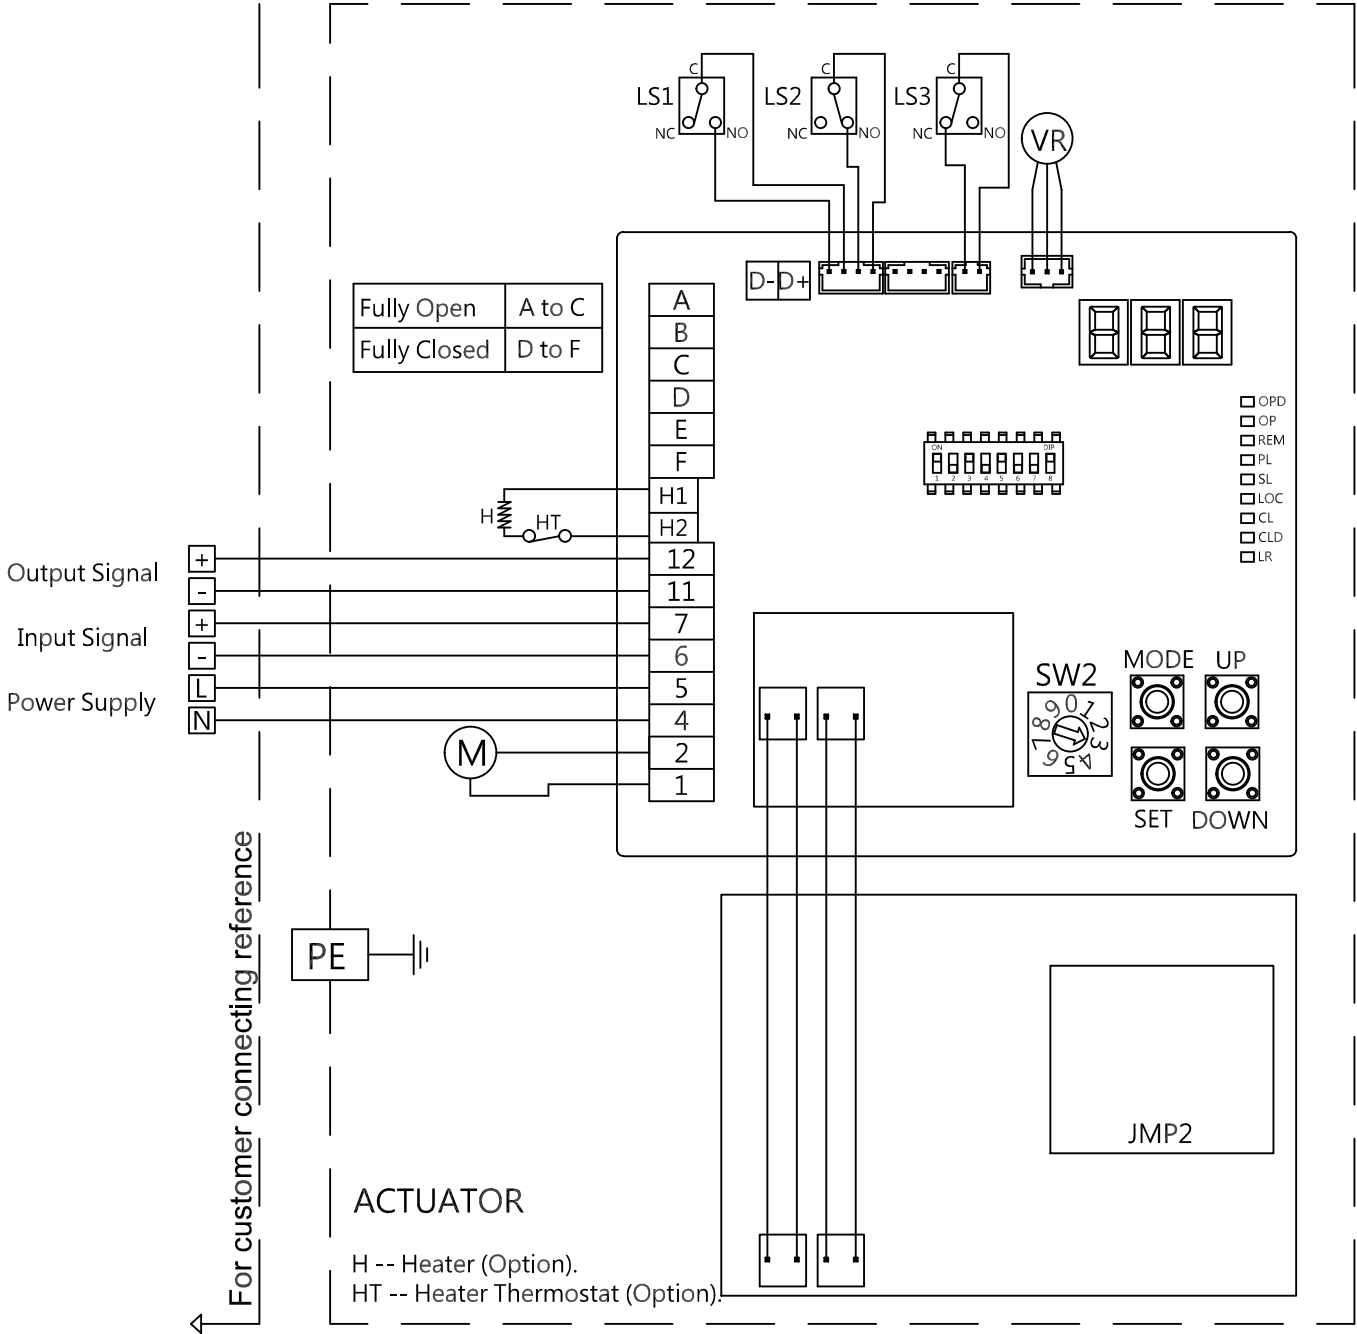

Wiring Diagram NO: 03-006-18-02-03-03-3-001			
Rev	1.0	Signature	Date
Designed			
Drawn	Wen Yao	2018/08/02	
Checked	Ming Hung	2018/08/15	
Approved			