


Note:

- (1). Modulating Board  
 Input Signal: 4~20mA, 1~5V, 2~10V.  
 ( it is suggested to use the shielding wire and its length should not exceed 30m).  
 Output Signal: 4~20mA, 2~10V.
- (2). Using less than 3A current for "A,B,C,D,E,F".

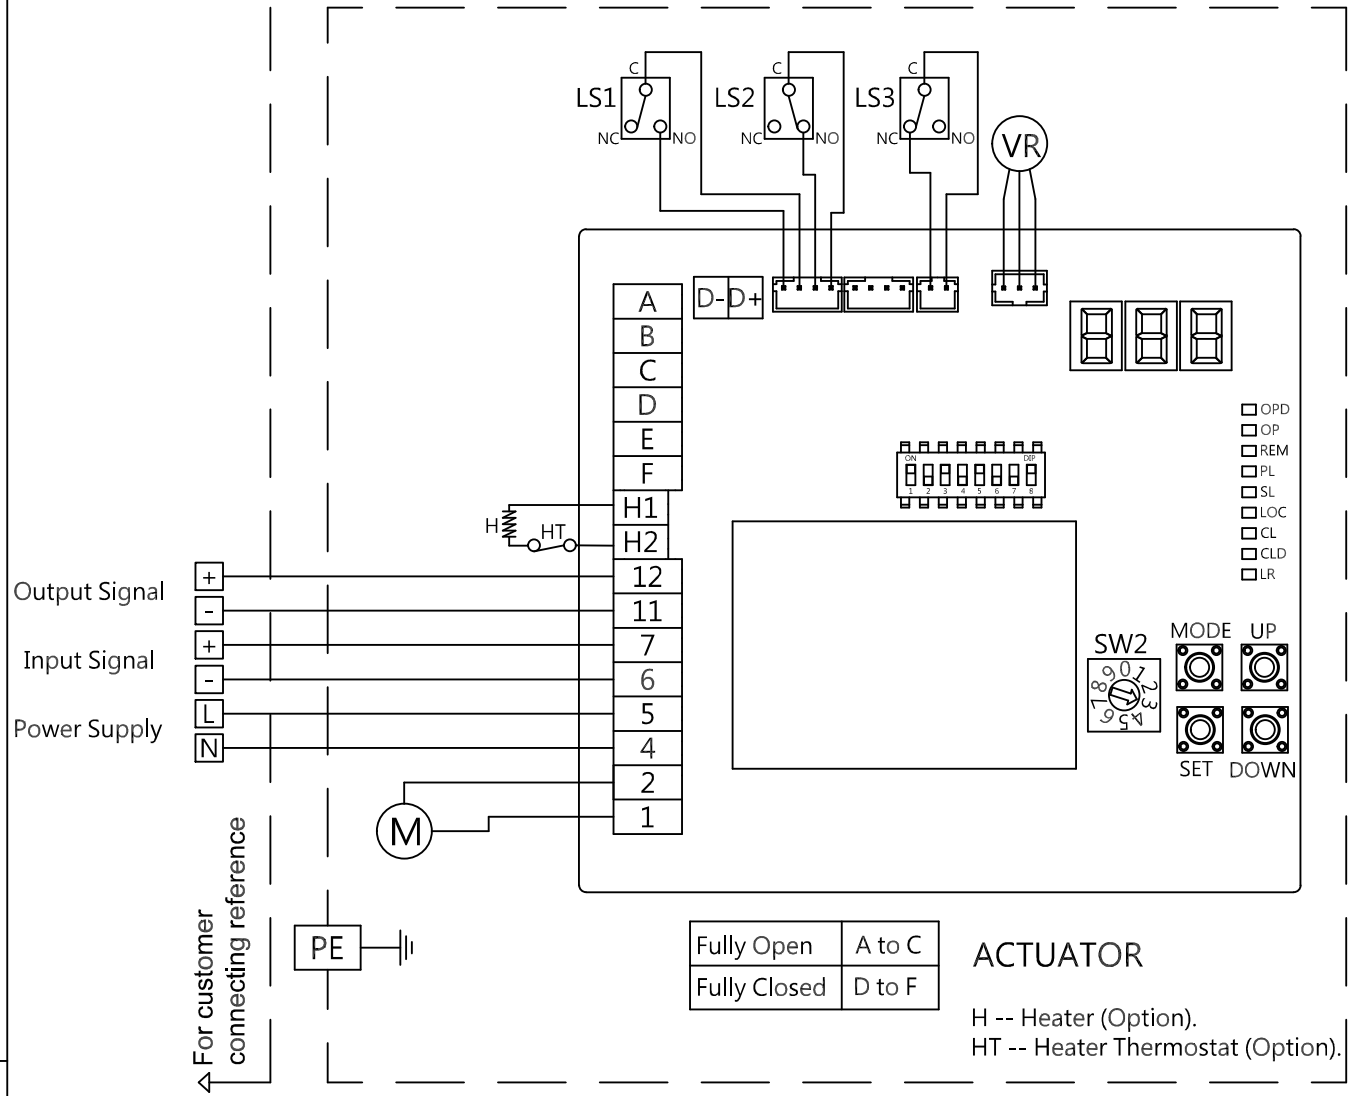

Wiring Diagram NO: 08-005-18-02-03-03-3-001

Rev	1.0	Signature	Date	LE250 · LE500 Power Supply : 220~240VAC 1-Phase Modulating Control 75% Duty Cycle
Designed				
Drawn	Wen Yao	2018/08/02		
Checked	Ming Hung	2018/08/18		
Approved				