


Note:

- (1). Modulating Board
 Input Signal : 4~20mA, 1~5V, 2~10V.
 (it is suggested to use the shielding wire and its length should not exceed 30m)
 Output Signal : 4~20mA, 2~10V.
- (2). Using less than 5A current for "A,B,C,D,E,F".

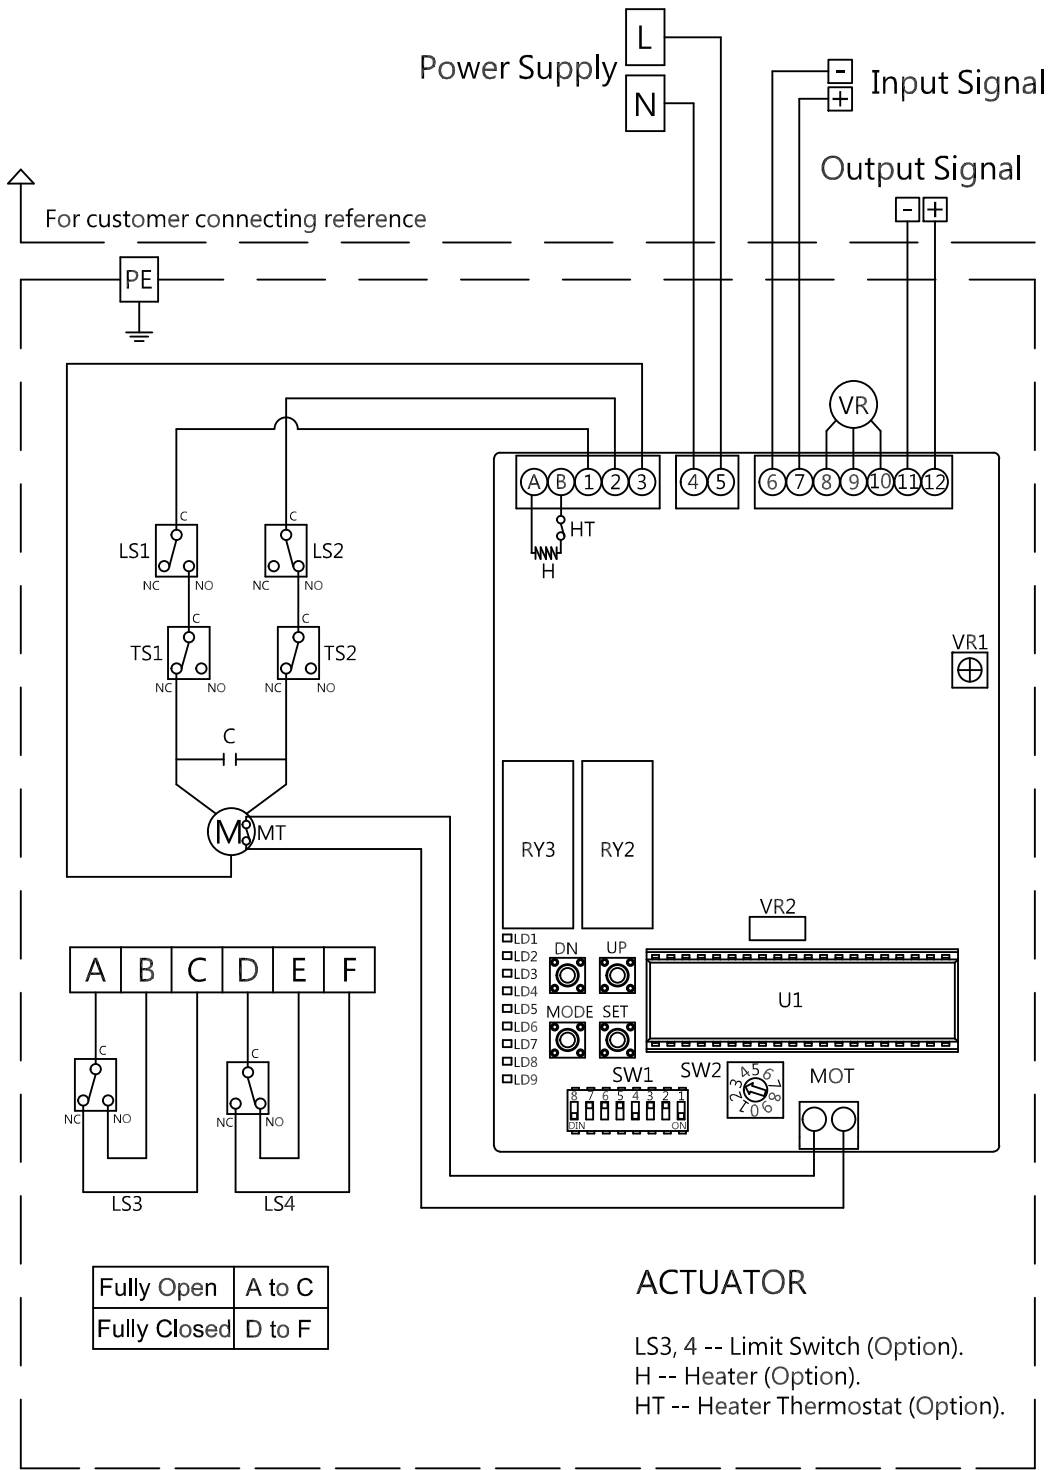

Wiring Diagram NO: 06-014-17-02-03-01-3-001

Rev	1.0	Signature	Date	OME2~OME8
Designed				Power Supply : 110~120VAC 1-Phase
Drawn	Wen Yao	2018/09/04		Modulating Control
Checked	Ming Hung	2018/09/04		30% Duty Cycle
Approved				